



LSP SERIES

AUTOMATIC LOWER SUCTION/ SUBMERSIBLE PUMP


Fully Automatic submersible pump with built in flow control.*



Model	LSP005PF	LSP007PF*	LSP010PF*
Horse Power	1/2 HP	3/4 HP	1.0 HP
Rated Power	370W	600 W	800 W
Max. Delivery Capacity	25GPM	27GPM	28GPM
Max. Pressure / Max. TDH	33 psi / 75ft	72 psi / 165 ft	80 psi / 189 ft
Pump connection	1 1/4" female thread	1" female thread	1" female thread
Min. water level for operation	8"	8"	8"
Weight (without cable) approx.	18lbs	18.2 lbs	19.7 lbs
Casing diameter (Max.)	3.9 in	3.9 in	3.9 in
Max. water temperature	95° F	95° F	95° F
Voltage / Frequency	115V / 60 Hz	115V / 60 Hz	115V / 60 Hz

Features:

- The LSP series pump head range is 25 to 180 feet and the maximum output is 25GPM
- Full automatic function, Inbuilt flow & pressure switch turns on/off based on the demand*
- Stainless steel housing w/ built in flow inducer for motor protection.*
- A thermal overload switch protects the motor
- The inbuilt bottom mount riser significantly reduces the suctioning of debris and sand.
- An energy-saving motor pumps the water with efficient and quiet performance.
- Easy installation and operation.

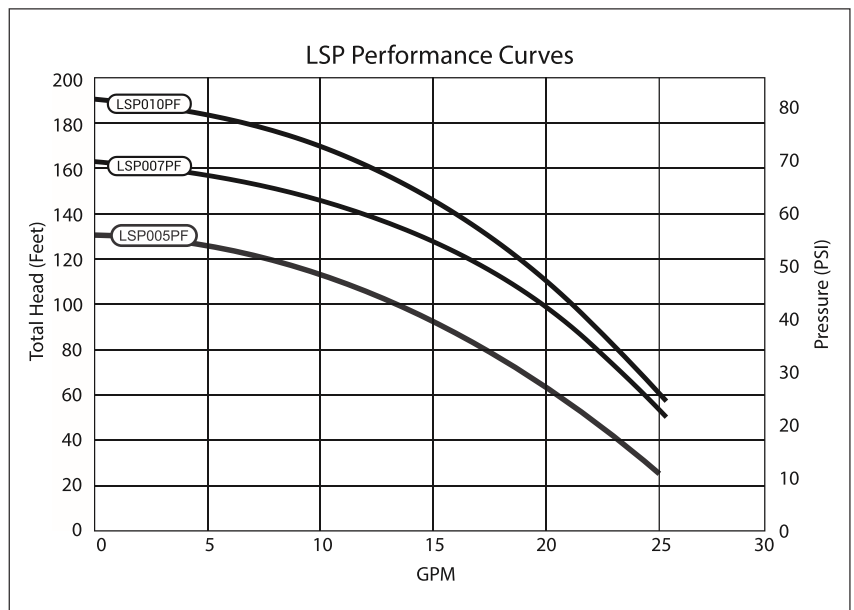

Submersibles and Electric, Inc.
 2664 S Litchfield Rd • Goodyear, Az • 85338
 888-938-3783
www.SEIpumps.com